

# TKS-120 SKID




**INCLUDED**



**R.O.T. SYSTEM**  
Electric Tilting System

**INCLUDED**

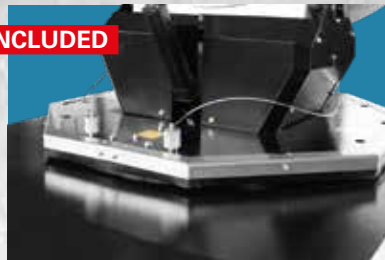

**R.O.T. SYSTEM**  
Automatic Oscillation 340 °

**INCLUDED**



**R.O.T. SYSTEM**  
Remote Control 50mt range



# TKS-120 SKID

Ideal for large outdoor areas, fully automatic, used for the most demanding applications, large mines and large demolition areas. Usefull also for sterilization and sanitation.

## R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

## STANDARD FEATURES


- SMART START SYSTEM
- Emergency stop button
- Separate electric cabinet
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Lifting eye
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crowns with 72 nozzles
- Automatic Water drain system
- Mounted on base with forklift pockets

## OPTIONS

- 60 Hz
- External pump for chemicals additives



LIFTING EYE



Stainless steel crowns with 72 NOZZLES



Mounted on **BASE** with forklift pockets



Safety **PRESSURE SWITCH**



**COVERAGE** without wind 110-120m

## TECHNICAL DATA

Electric engine power	kW	108	Water inlet filter	Mesh	60
Water consumption	l/m	145 - 160	Y Filter	µm	500
Coverage (without wind)	m	110 - 120	Electric Tilting system	-	0 - 35°
Max. water throw height	m	40	Automatic oscillation	-	0 - 340°
Water connection	-	UNI 45 or STORZ or CAMLOCK	Dimensions	mm	2480 x 2180 x 2470
Min. inlet Water pressure	bar	1.0	Weight	Kg	2990

